



C5e INLINE COUPLER UTP

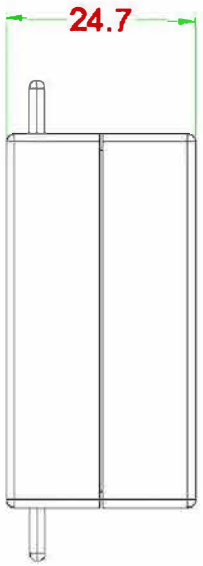

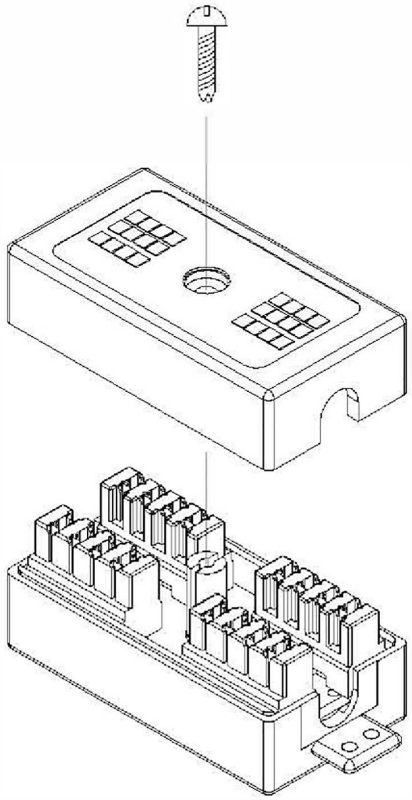



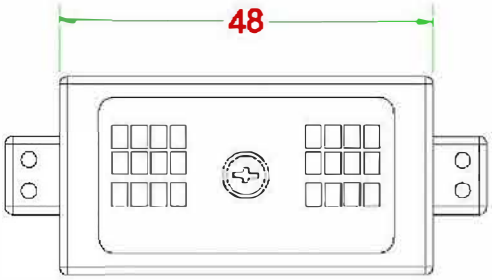

Performance:

Meets C5e EIA/TIA 568B Standard.

Materials:

Body : Black Fireproof ABS
UL-94V0 PCB : FR-4 / UL-94V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 or Krone punch-downTool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 cycles

Operation Temperature : -40 ℃ ~ +70 ℃

DRAW NO:			ITEM NO:	301021
	APPR		CUSTOMER:	
UNIT: m/m	DESIGN		DATE:	
SCALE:	Ref. NO:		TOLERANCE:	X ± 1 · X ± 0.2 · XX ± 0.15