


FIGURE 1



INDENT MARKING: GFC-3R◁ VDE▷ KEMA-KEUR◁ SEMKO▷ ◁ DEMKO▷◁ NEMKO▷◁ FIMKO▷ ◁ CEBEC 618▷◁ ÖVE▷ +ᔕ +ᔕ +ᔕ
IEMMEQU NF-USE-1291-H05VV-F 3G 1.5mm^2 LONGWELL-P XXXX
YEAR

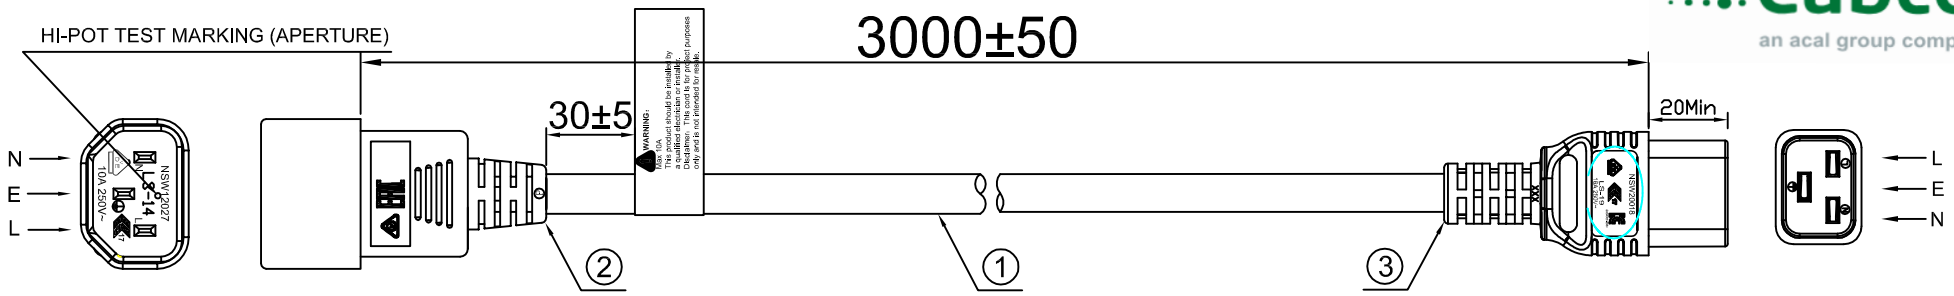

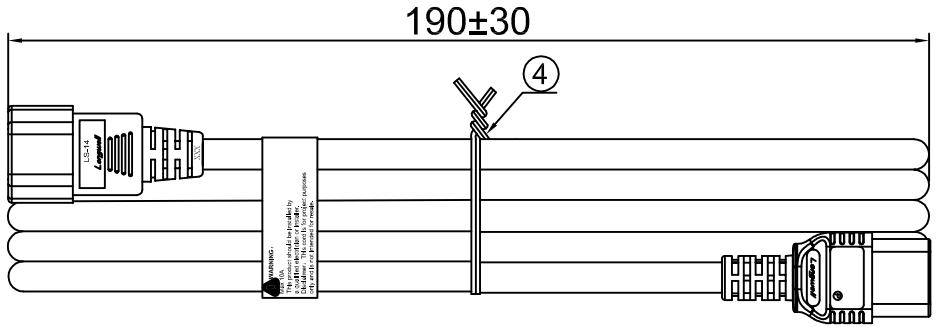



CROSS-SECTION VIEW

WARNING:
Max 10A
This product should be installed by
a qualified electrician or installer.
Disclaimer: This cord is for project purposes
only and Is not Intended for resale.

WARNING:
Max 10A
This product should be installed by
a qualified electrician or installer.
Disclaimer: This cord is for project purposes
only and Is not Intended for resale.

Warning labels

NOTES:

1. CABLE: THE CORD SHALL COMPLY WITH IEC 60227.
2. PLUG: THE PLUG SHALL COMPLY WITH IEC60320-1 STANDARD (C14 PLUG CONNECTOR).
3. CONNECTOR: THE MOLDED CONNECTOR SHALL COMPLY WITH IEC 60320-1 STANDARDS (C19 CONNECTOR).
4. THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
5. COLOR:RAL 5005 BLUE(LONGWELL P/N: LT).
6. THIS PRODUCT IS RoHS COMPLIANT.

ITEM	DESCRIPTION	Q'TY	U/M
5	WARNING LABELS	1	EA
4	MINI TIE	1	EA
3	MOLDED CONNECTOR: LS-19 16A/250V	1	EA
2	MOLDED PLUG: LS-14 10A/250V	1	EA
1	H05VV-F 1.5mm² 3C BLUE	1	EA

Tolerance: >0±0.3 >1±0.5 >10±1 >20±2 Angle: ±1°	Approved by: Jacky		
	Checked by: ZSB	Customer : Acal BFi	
	Drawn by: ZWZ	Customer P/N: IN05.H28.C19.0300.BE	
	Date: 05.14.2021	Longwell P/N: 1250-0279	
	Scale: X Unit: mm	DWG. NO: GW-00023	
Specification Use Only		SHEET 1 OF 1	REV: 1

REV	ECN NO	DESCRIPTION	APPD.	DATE
1		Original Picture		05.14.21