


FIGURE 1



INDENT MARKING：GFC-3R◁ VDE▷ KEMA-KEUR◁ SEMKO▷ ◁ DEMKO▷◁ NEMKO▷◁ FIMKO▷ ◁ CEBEC 618▷◁ ÖVE▷ +ᔕ + ᔕ + ᔕ
IEMMEQU NF-USE-1291-H05VV-F 3G 1.5mm² LONGWELL-P XXXX
YEAR

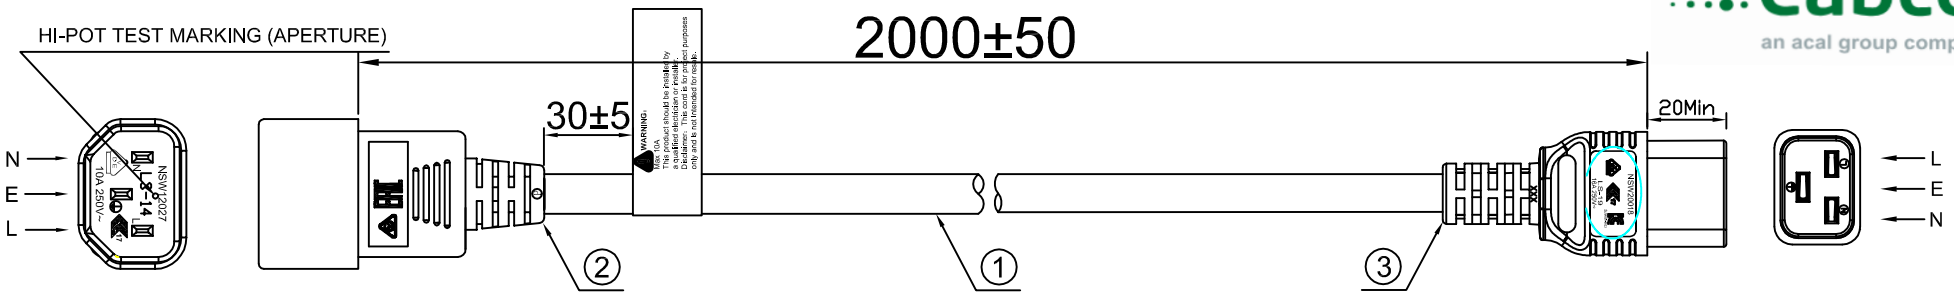

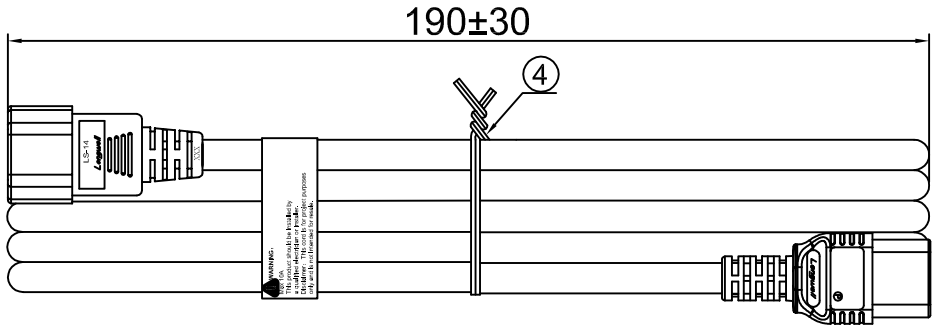



CROSS-SECTION VIEW

WARNING：
Max 10A
This product should be installed by
a qualified electrician or installer.
Disclaimer：This cord is for project purposes
only and is not intended for resale.

WARNING：
Max 10A
This product should be installed by
a qualified electrician or installer.
Disclaimer：This cord is for project purposes
only and is not intended for resale.

Warning labels

NOTES：

1. CABLE：THE CORD SHALL COMPLY WITH IEC 60227.
2. PLUG：THE PLUG SHALL COMPLY WITH IEC60320-1 STANDARD (C14 PLUG CONNECTOR).
3. CONNECTOR：THE MOLDED CONNECTOR SHALL COMPLY WITH IEC 60320-1 STANDARDS (C19 CONNECTOR).
4. THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
5. COLOR：RAL 3020 RED (LONGWELL P/N：2X).
6. THIS PRODUCT IS RoHS COMPLIANT.

ITEM	DESCRIPTION	Q'TY	U/M
5	WARNING LABELS	1	EA
4	MINI TIE	1	EA
3	MOLDED CONNECTOR：LS-19 16A/250V	1	EA
2	MOLDED PLUG：LS-14 10A/250V	1	EA
1	H05VV-F 1.5mm² 3C RED	1	EA

Tolerance:
>0±0.3
>1±0.5
>10±1
>20±2
Angle:
±1°

Approved by: Jacky
Checked by: ZSB
Drawn by: ZWZ
Date: 05.14.2021
Scale: X
Unit: mm

良維科技 Longwell 股份有限公司 COMPANY

Customer : Acal BFi
Customer P/N: IN05.H28.C19.0200.R
Longwell P/N: 1250-0281
DWG. NO: GW-00025
REV: 1
SHEET 1 OF 1
Specification Use Only

REV	ECN NO	DESCRIPTION	APPD.	DATE
1		Original Picture		05.14.21