


FIGURE 1



INDENT MARKING: GFC-3R◁ VDE▷ KEMA-KEUR◁ SEMKO▷ ◁ DEMKO▷◁ NEMKO▷◁ FIMKO▷ ◁ CEBEC 618▷◁ ÖVE▷ +ᔕ +ᔕ +ᔕ
IEMMEQU NF-USE-1291-H05VV-F 3G 1.5mm² LONGWELL-P XXXX
YEAR

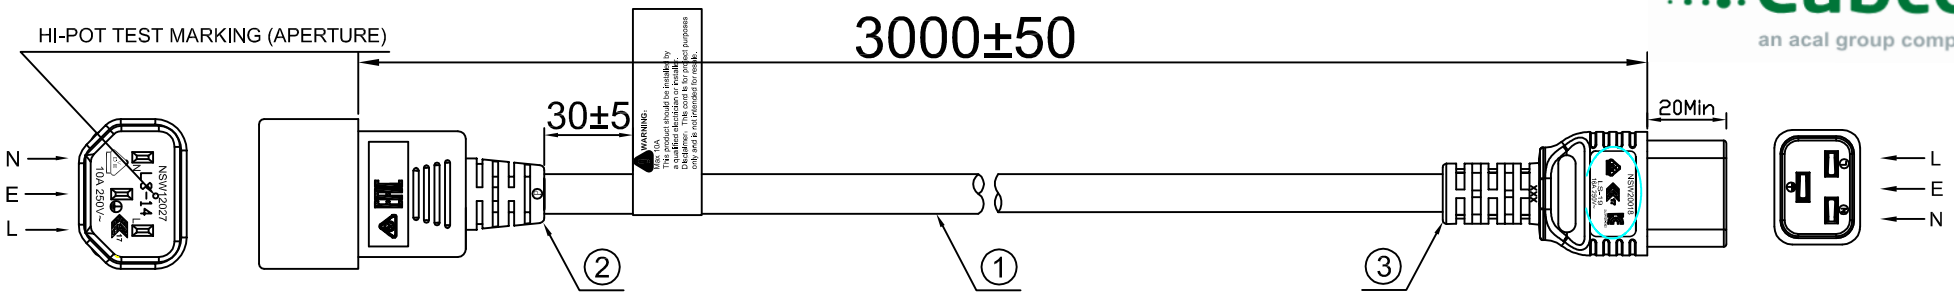

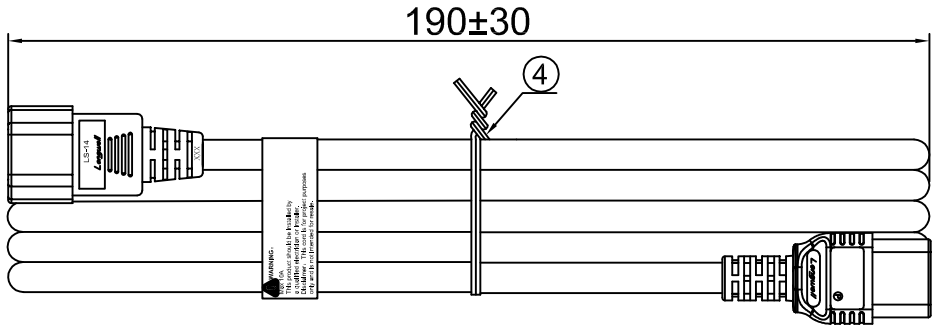



CROSS-SECTION VIEW

WARNING:
Max 10A
This product should be installed by
a qualified electrician or installer.
Disclaimer: This cord is for project purposes
only and is not intended for resale.

WARNING:
Max 10A
This product should be installed by
a qualified electrician or installer.
Disclaimer: This cord is for project purposes
only and is not intended for resale.

Warning labels

NOTES:

1. CABLE: THE CORD SHALL COMPLY WITH IEC 60227.
2. PLUG: THE PLUG SHALL COMPLY WITH IEC60320-1 STANDARD (C14 PLUG CONNECTOR).
3. CONNECTOR: THE MOLDED CONNECTOR SHALL COMPLY WITH IEC 60320-1 STANDARDS (C19 CONNECTOR).
4. THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
5. COLOR: RAL 3020 RED (LONGWELL P/N: 2X).
6. THIS PRODUCT IS RoHS COMPLIANT.

ITEM	DESCRIPTION	Q'TY	U/M
5	WARNING LABELS	1	EA
4	MINI TIE	1	EA
3	MOLDED CONNECTOR: LS-19 16A/250V	1	EA
2	MOLDED PLUG: LS-14 10A/250V	1	EA
1	H05VV-F 1.5mm² 3C RED	1	EA

Tolerance:
>0±0.3
>1±0.5
>10±1
>20±2
Angle:
±1°

Approved by: Jacky
Checked by: ZSB
Drawn by: ZWZ
Date: 05.14.2021
Scale: X
Unit: mm

Customer : Acal BFi
Customer P/N: IN05.H28.C19.0300.R
Longwell P/N: 1250-0282
DWG. NO: GW-00026
REV: 1
SHEET 1 OF 1

Specification Use Only

REV	ECN NO	DESCRIPTION	APPD.	DATE
1		Original Picture		05.14.21