
FIGURE 1

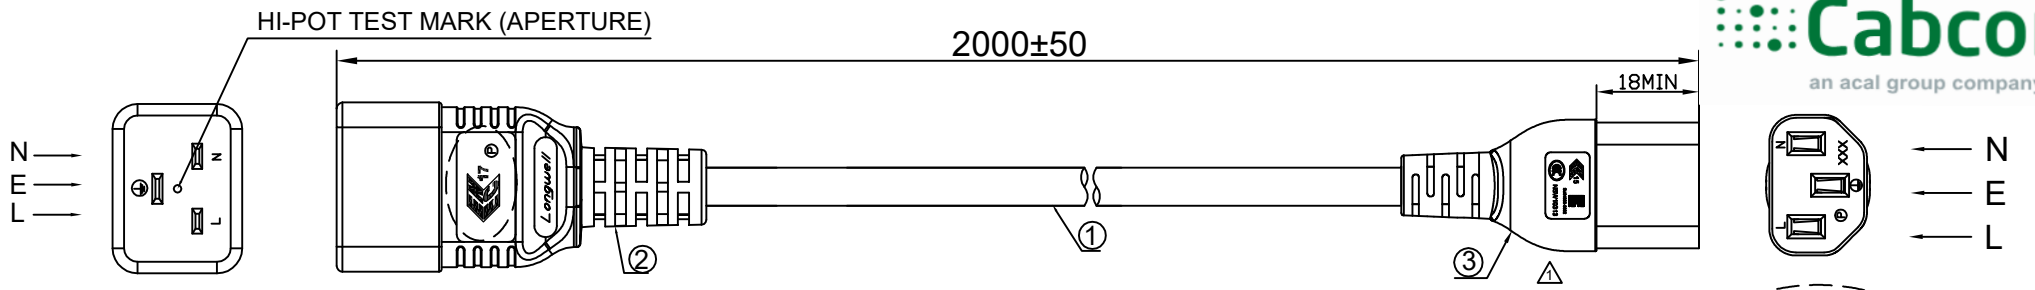

INDENT MARKING:

GFC-3R◁VDE▷KEMA-KEUR◁SEMKO▷ ◁DEMKO▷ ◁NEMKO▷ ◁FIMKO▷ ◁CEBEC 618 ▷◁DVE ▷ S+ S+ S


IEMMEQU NF-USE-1291-H05VV-F 3G 1.00mm² LONGWELL-P XXXX


YEAR

SU04003-3002

NSW10313

LS-20
16A 250V~

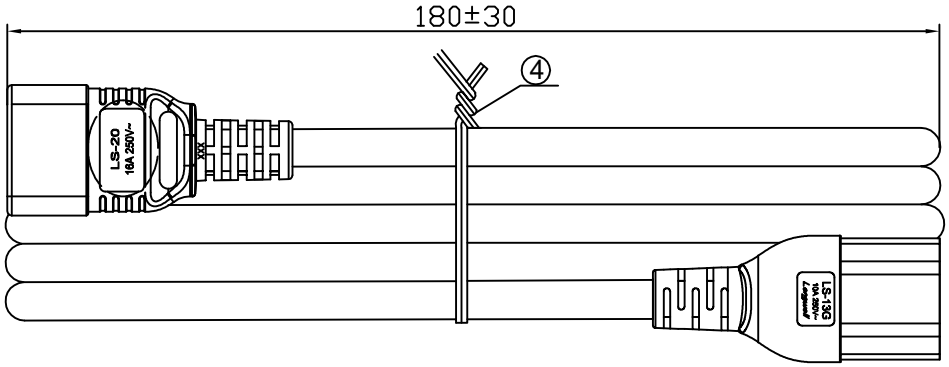



CROSS-SECTION VIEW

ITEM	DESCRIPTION	Q'TY	U/M
4	MINI TIE	1	EA
3	(MOLDED CONNECTOR) LS-13G,10A/250V	1	EA
2	(MOLDED PLUG) LS-20,16A/250V	1	EA
1	H05VV-F 1.00mm² 3C, RED	1	EA

NOTES:

1. CABLE: THE CORD SHALL COMPLY WITH IEC 60227.
2. PLUG : THE PLUG SHALL COMPLY WITH IEC60320-1 STANDARD (C20 PLUG CONNECTOR).
3. CONNECTOR: THE CONNECTOR SHALL COMPLY WITH IEC60320-1 STANDARD (C13 CONNECTOR).
4. THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
5. COLOR: RAL 3020 RED (LONGWELL P/N:).
6. THIS PRODUCT IS RoHS COMPLIANT.

REV	ECN NO	DESCRIPTION	APPD.	DATE
2	△1	Chang connector CCC logo to new		10/08/22
1		Initial Release		07/31/20

Tolerance: >0±0.3 >1±0.5 >10±1 >20±2 Angle: ±1°	Approved by: Jacky		
	Checked by: ZSB	Customer : Acal Bfi	
	Drawn by: ZhangHui	Customer P/N: IN24.H26.C13.0200.R	
	Date: 10/08/2022	Longwell P/N: 1250-0185	
	Scale: X Unit: mm	DWG. NO: GW-00002	
Specification Use Only		SHEET 1 OF 1	REV: 2

99.02.22

SG-E-R