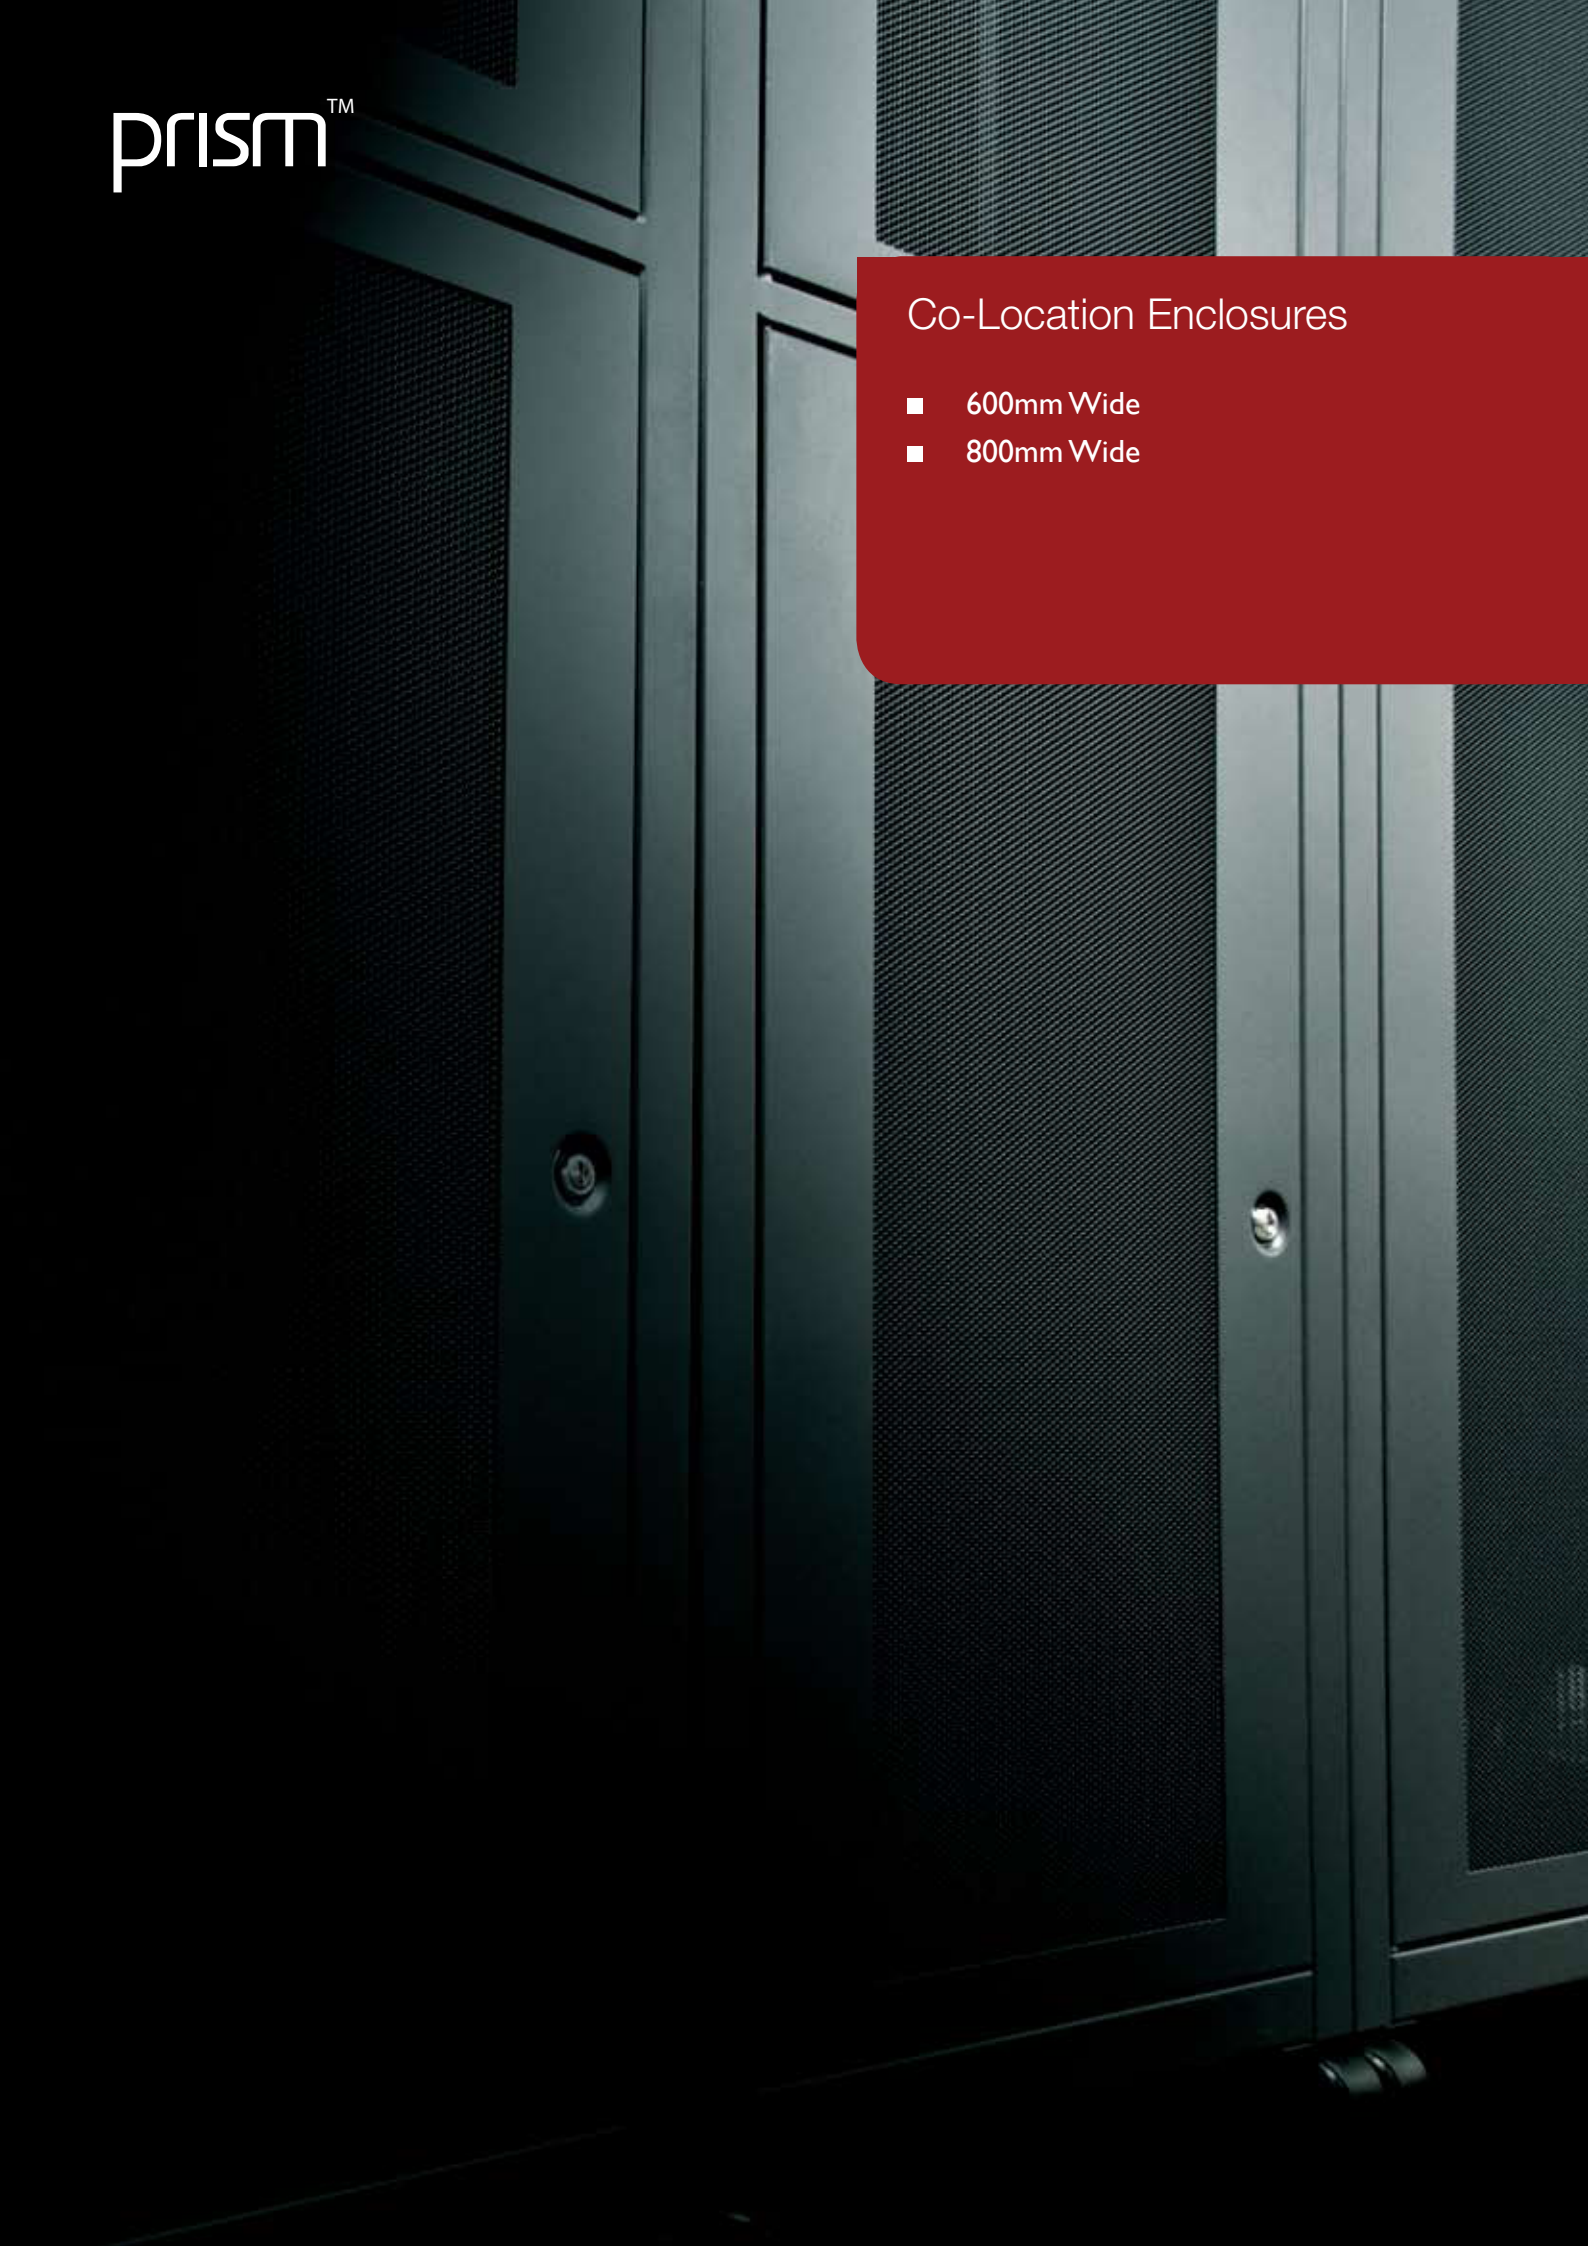


prism™

Co-Location Enclosures

- 600mm Wide
- 800mm Wide

Co-Location Enclosures

The newly launched Prism co-location range has been designed to accommodate the requirements of multi user requirements. Available in FI and Pi format there are a choice of 2 and 4 compartment products and available in multiple footprint sizes. In the continued struggle for real estate within the data centre, the co-location range will provide the maximum utilisation of space.

Co-Location

With a choice of two heights and four footprints and two compartment options there is a co-location cabinet for any installation. This can be mated with any PI or FI cabinet to provide a solution for any co-location environment and provide additional revenue per square metre. The product is supplied with secure internal cable trunking to provide total security for each compartment. This trunking can be accessed from the top and the bottom of each enclosure.



Goose Grey RAL 00A05

Black RAL 9005

Call

Lead Time On Request

Typical Applications


- Server Farms
- Multiple Co-Location Data Centres
- Hosting Centres

Features List

- Mesh front doors with combination locks with master Key override
- Mesh rear doors with combination locks with master Key override
- 19 inch mounting angles (2 x Rear 2 x front)
- 2 and 4 option co-location dividing panels
- 2 way cable secure ducting accessible in each location and top and bottom access
- Heavy Duty Castors fitted as standard
- Earthing kits supplied to each section
- Two compartment or four compartment options available Fitted with vented doors to the front and rear as standard
- Fully enclosed bays with fully vented divider shelves
- Enclosed cable ducting fitted as standard

Benefits and Additional Features

- Floor space optimisation
- Compatable with baying Pi Data and Server Cabinets
- Compatability with the full range of Pi Accessories
- Multiple working variants available to assist in providing differing levels of security

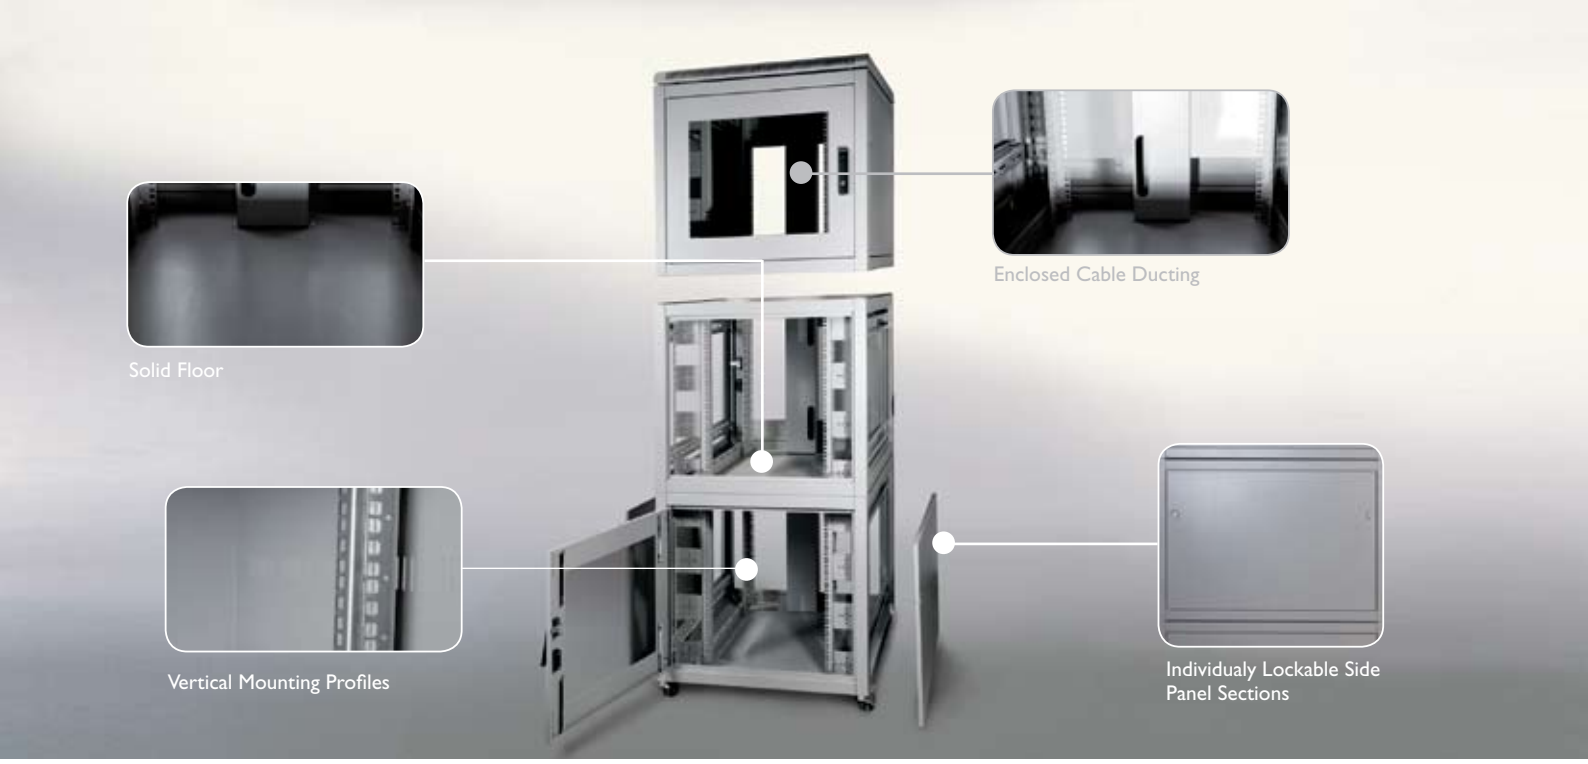

Co-Location

Each section is supplied with its own external security and unique, combination ofelectronic lock systems can be added. These locks can be installed in glass, mesh or solid doors depending on client specification. The side panels are also supplied with unique locks.



Enclosed Cable Ducting



Solid Floor



Individual Lockable
Side Panel Sections



Optional Mesh doors available



Bolted Steel Frame Chassis
With High Load Capacity

Custom Solutons

Bespoke solutions available, Please contact our sales team.





Tel: + 44 (0)1923 698230

Fax: +44 (0)1923 211190

Co-Location Enclosures



Model Shown: CAB42682PARTCOLO

SPECIFICATION & ORDERING CHART

600mm and 800mm Wide Enclosures

Product Code	U Height	Compartments	Width (mm)	Depth (mm)	Height (mm)
CAB366102PARTCOLO	36	2	600	1000	1970
CAB36882PARTCOLO	36	2	800	800	1970
CAB368102PARTCOLO	36	2	800	1000	1970
CAB42682PARTCOLO	42	2	600	800	2235
CAB426102PARTCOLO	42	2	600	1000	2235
CAB42882PARTCOLO	42	2	800	800	2235
CAB428102PARTCOLO	42	2	800	1000	2235
CAB48682PARTCOLO	48	2	600	800	2505
CAB486102PARTCOLO	48	2	600	1000	2505
CAB48882PARTCOLO	48	2	800	800	2505
CAB488102PARTCOLO	48	2	800	1000	2505

Goose Grey RAL 00A05

Black RAL 9005

Call

Lead Time On Request

Related Accessories



See Page 36 for the full range of compatible fan units



See Page 35 for the full range of compatible shelves



See Page 50 for the full range of power distribution units



See Page 38 for the full range of compatible cable management

Co-Location Enclosures



Model Shown: CAB488104PARTCOLO

SPECIFICATION & ORDERING CHART

600mm and 800mm Wide Enclosures

Product Code	U Height	Compartments	Width (mm)	Depth (mm)	Height (mm)
CAB36684PARTCOLO	36	4	600	800	2025
CAB366104PARTCOLO	36	4	600	1000	2025
CAB36884PARTCOLO	36	4	800	800	2025
CAB368104PARTCOLO	36	4	800	1000	2025
CAB40684PARTCOLO	40	4	600	800	2205
CAB406104PARTCOLO	40	4	600	1000	2205
CAB40884PARTCOLO	40	4	800	800	2205
CAB408104PARTCOLO	40	4	800	1000	2205
CAB48684PARTCOLO	48	4	600	800	2815
CAB486104PARTCOLO	48	4	600	1000	2815
CAB48884PARTCOLO	48	4	800	800	2815
CAB488104PARTCOLO	48	4	800	1000	2815

Goose Grey RAL 00A05

Black RAL 9005

Call

Lead Time On Request

Related Accessories



See Page 36 for the full range of compatible fan units



See Page 38 for the full range of cable management



See Pages 35-41 for the full range of compatible accessories



See Page 23 for door options