# 2-Port RS232/RS422/RS485 Serial Device Server



## Cost-effective Solution for RS232/422/485 Serial-to-Ethernet Application


PLANET ICS-120 Serial Device Server is specially designed to convert two serial RS232/RS422/RS485 communication interfaces into Fast Ethernet networking to extend the network distance efficiently and inexpensively.




There is one 10/100BASE-TX RJ45 port in the ICS-120, making connected serial equipment become IP-based, and able to also connect to a TCP/IP networking immediately. And its operating temperature ranging from -10 to 60 degrees C is designed for all your network requirements.

The ICS-120 is a time-saving and cost-effective solution for users and system integrators to quickly transform their serial devices into the Ethernet network with no need of replacing the existing serial devices and software system.

*Converting Serial Communication to IP Networking*

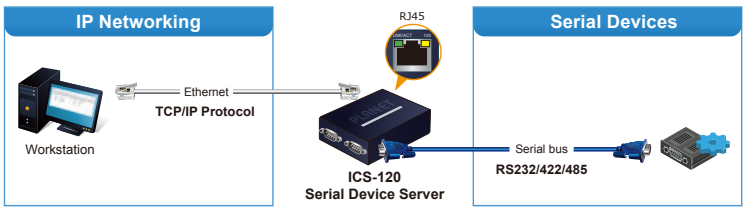


## Serial Interface

- Two DB9 interfaces that support RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- Asynchronous serial data rates up to 921600bps
- Data mode includes VCOM, RFC2217, TCP server, TCP client, UDP, remote pairing, Modbus converter server / client and serial telnet modes

## Ethernet Interface

- 1-port 10/100BASE-TX RJ45 with auto MDI/MDI-X function

## Management


- IPv4 and IPv6 dual stack management
- Remote Management Interfaces
  - IP-based Web management
  - Telnet console management
  - Windows-based VCOM utility supports searching, monitoring and configuration setting
- IP NTP (Network Time Protocol)
- Standard TCP/IP interface and versatile operation modes
- Software Protocol supports ICMP, TCP/IP, UDP, HTTP server, DHCP client, Telnet server/client
- Serial operation mode selected via management interface
- Pair connection mode for connecting two serial devices over a network
- Allows a maximum of 4 hosts to be accessed as TCP client mode
- Firmware upgrade via HTTP protocol
- Accessible IP security control to prevent illegal users
- Event notification
  - Remote syslog server
  - SNMP trap
- DHCP client for IP address assignment
- PLANET Smart Discovery utility automatically finds the client devices on the network

## Case and Installation

- Compact size for easy Installation:
  - Standalone -- Wall mounting or DIN-rail mounting (optional accessory)
- External power adaptor 5V DC, 2A max.
- Supports 6000 VDC Ethernet ESD protection
- -10 to 60 degrees C operating temperature
- Supports extensive LED indicators for network diagnosis
- Reset button for resetting to factory default

### Remote Management


As the ICS-120 provides easy serial-to-Ethernet connectivity and connection to a TCP/IP network, the remote network system can thus be managed efficiently via its Web, telnet, and VCOM management interfaces. It supports both application and serial operation modes for alarm or IP address connection, which saves the administrator's time in detecting and locating network problems without visual inspection of the cabling and devices. Multiple connection options are available for a large networking environment as well.

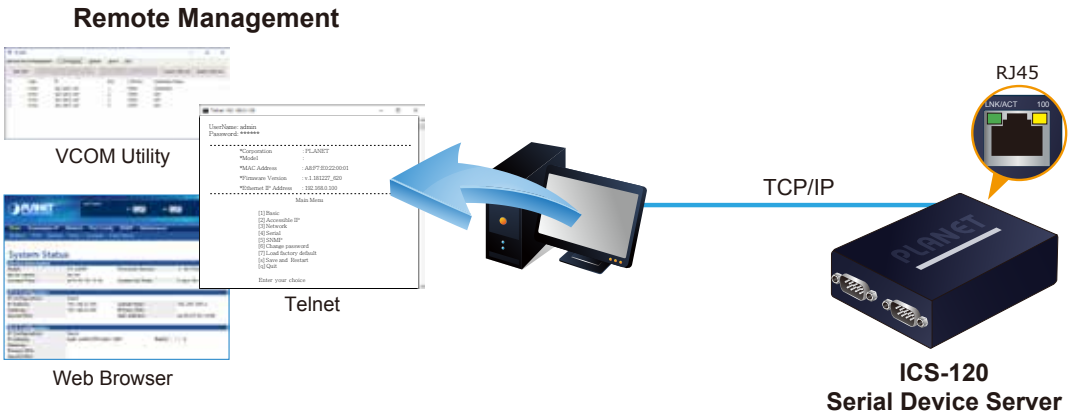


## Applications


*Access Control System – Traditional System Application*

Most of the enterprises and government use access control plate and Mifare or RFID to authorize entrance identity. Traditionally, the access control machines use RS232 or RS485 serial interface with their cables connecting to login server. By applying the ICS-120 Serial Device Server, the access control machine is able to extend the network over longer distances via Ethernet interfaces. In addition, the ICS-120 can be linked to an xDSL router to get the internet access capability so that the access control can be set and monitored over the internet.

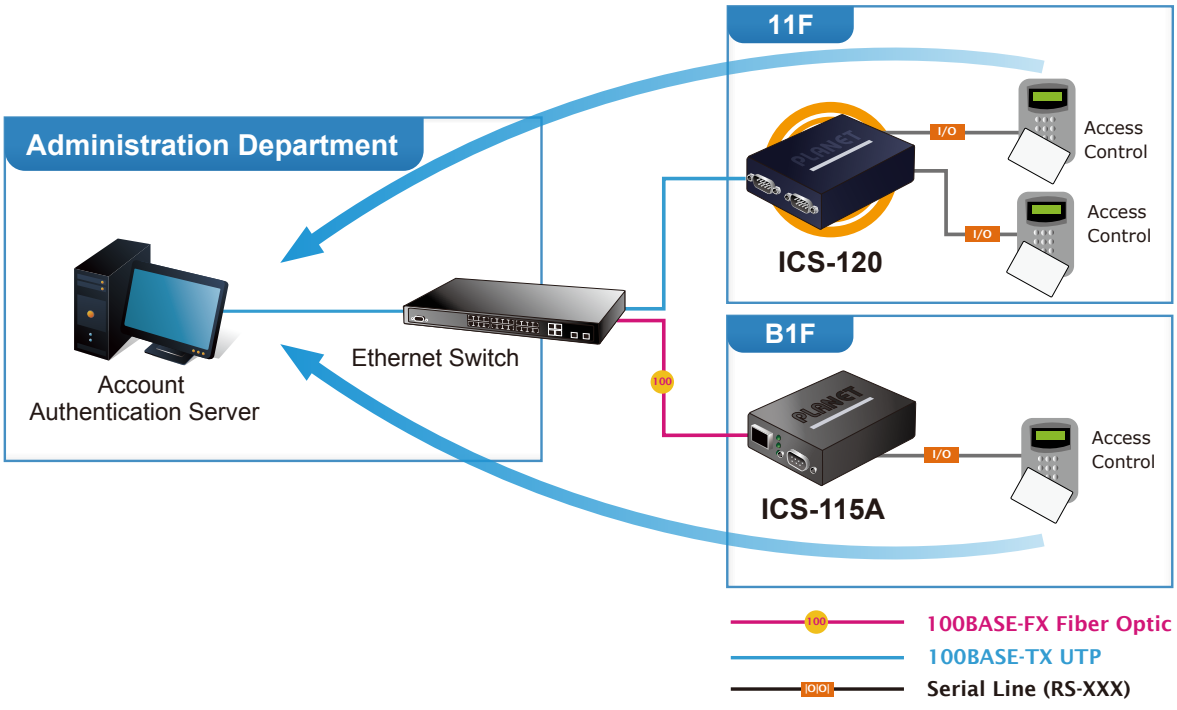



*Process Control*

To monitor, configure and manage the robotic conveyer including other production machines, PLC (programmable logical control) is required to drive the above manufacturing process. The ICS-120 can be set to the TCP server mode and connected to the PLC. Thus, the administrator can configure and set command settings through Fast Ethernet intranet to remotely control the PLC, without having to stand by the I/O machine.

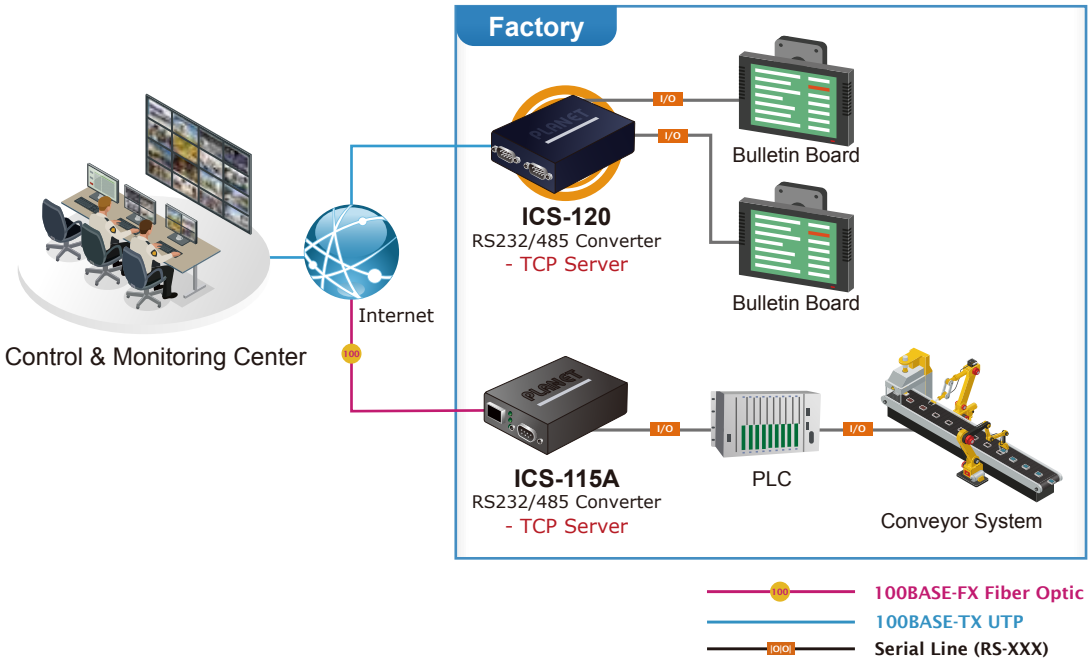



*RTU Data Collect – UDP Mode*

Connect with RTU (remote terminal unit) to collect and monitor the data of waves, signal and power utilization. The ICS-120 can be used to set up UDP mode and send data over Fast Ethernet to local server or over Internet to remote server automatically.

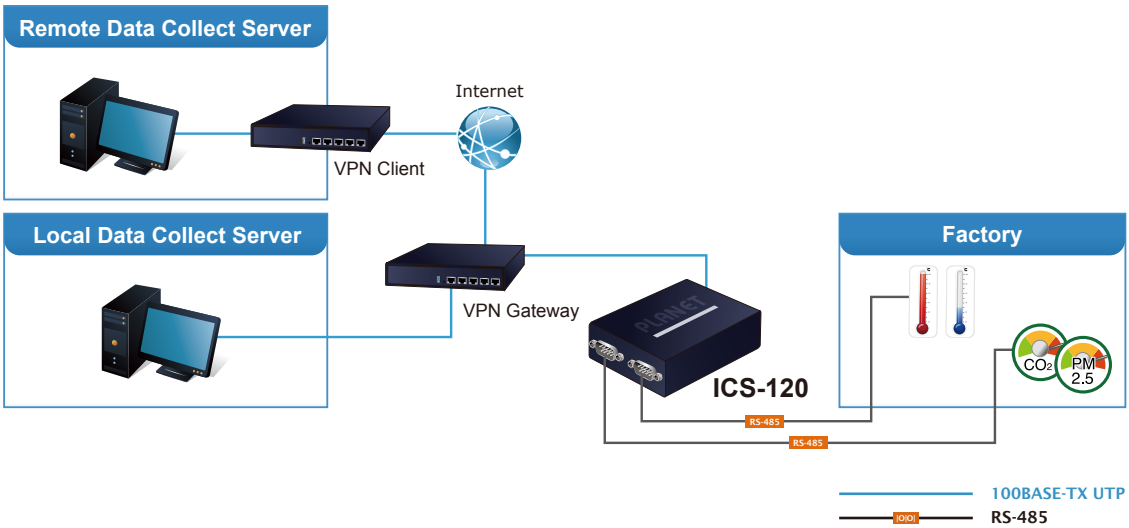



*Surveillance Motion Control – Pair Connection Mode*

Using pair connection mode via the fiber optic patch cord, the ICS-120 can extend the distance of the deployed devices via RS232, RS422 and RS485 interfaces, making the remote management of these devices from the monitoring center easier and efficient.

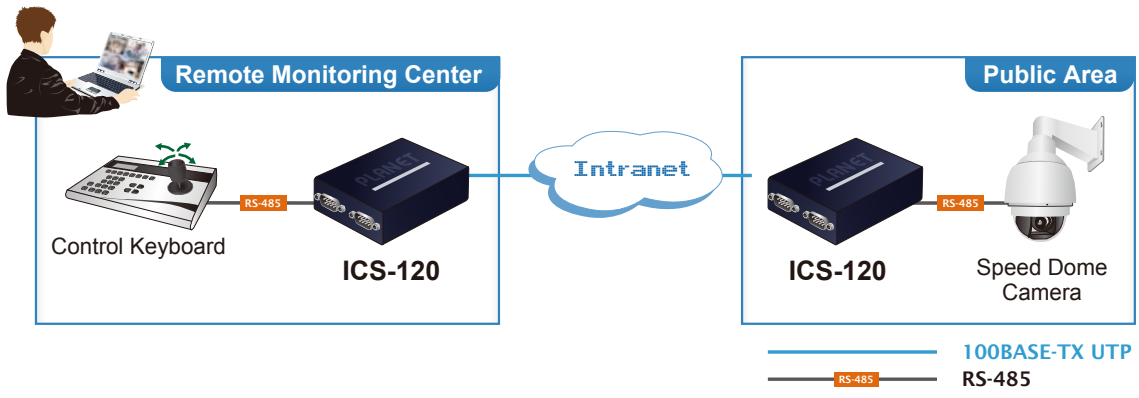

# Product Specifications

| | |
|---|---|
| Product | ICS-120 |
| **Serial Interface** | |
| Serial Port | 2 x DB9 male |
| Serial Standards | RS232/RS422/4-wire RS485/2-wire RS485 |
| Baud Rate (Data Rate) | 50bps to 921Kbps |
| Data Bits | 5, 6, 7, 8 |
| Stop Bit | 1, 1.5, 2 |
| Parity Type | Odd, Even, None, Space, Mark |
| Flow Control | RTS/CTS and DTR/DSR (RS232 only)<br>XON/XOFF |
| Signals | RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND<br>RS422: Tx+, Tx-, Rx+, Rx-, GND<br>4-wire RS485: Tx+, Tx-, Rx+, Rx-, GND<br>2-wire RS485: Data A (+), Data B (-), GND |
| Pin Assignment |  |


| Male DB9 | Pin | RS232 | RS422<br>RS485-4W | RS485-2W |
|---|---|---|---|---|
| | 1 | DCD | TxD+ | -- |
| | 2 | RxD | TxD- | -- |
| | 3 | TxD | RxD- | Data- |
| | 4 | DTR | RxD+ | Data+ |
| | 5 | GND | GND | GND |
| | 6 | DSR | -- | -- |
| | 7 | RTS | -- | -- |
| | 8 | CTS | -- | -- |
| | 9 | -- | -- | -- |

| | |
|---|---|
| **Ethernet Interface** | |
| Ethernet Ports | 1 x RJ45 |
| Standard | 10/100BASE-TX |
| Distance | 100m |
| ESD Protection | 6KV |
| **Hardware** | |
| Dimensions (W x D x H) | 97 x 70 x 26mm |
| Weight | 184g |
| LED Indicators | System: Link<br>TP Port: Link/ Active<br>Serial Port: Active |
| Power Requirements | External Power Adaptor 5V DC, 2A max. |
| Power Consumption | 5.5 watts (max.) |
| Enclosure | Metal |
| Installation | Standalone, wall-mount , and DIN-rail kit (optional) |
| Reset Button | < 5 sec: System reboot<br>> 5 sec: Factory default |
| **Management** | |
| Management Interfaces | Web management<br>Telnet Console management<br>Windows-based VCOM Utility management<br>SNMPv1, v2c / SNMP trap<br>UNI-NMS monitoring<br>PLANET Smart Discovery Utility |
| IP Version | IPv4 and IPv6 |
| Operation Mode | ■ TCP server / TCP client<br>■ UDP client<br>■ Virtual COM<br>■ RFC2217<br>■ Telnet server<br>■ Pair connection – Remote (Slave)<br>■ Pair connection – Local (Master)<br>■ Modbus converter server / client |

| | |
|---|---|
| Virtual COM Utility Platform Support | Windows-based Only:<br>Windows XP<br>Windows Server 2003<br>Windows 7<br>Windows Server 2008<br>Windows 8 (Must install the latest version of WinPcap)<br>Windows Server 2012 (Must install the latest version of WinPcap)<br>Windows 10 |
| Fault Alarm | Record: System log / SNMP trap |
| Time | NTP |
| Security | Accessible IP (white list) |
| SNMP | SNMP v1 and v2c |
| Standards Conformances | |
| Regulatory Compliance | FCC Part 15 Class A,<br>CE Certification Class A |
| Standards | IEEE 802.3 10BASE-T<br>IEEE 802.3u 100BASE-TX<br>RFC 768 UDP<br>RFC 793 TFTP<br>RFC 791 IP<br>RFC 792 ICMP<br>RFC 854 Telnet<br>RFC 958 NTP<br>RFC 1908 SNMPv2c<br>RFC 2068 HTTP<br>RFC 2131 DHCP Client<br>RFC 2732 Format for Literal IPv6 Addresses in URL's<br>RFC 3315 DHCPv6 Client<br>RFC 3513 IPv6 Addressing Architecture<br>RFC 4443 ICMPv6<br>EIA/TIA RS232/422/485 |
| Regulatory Approval | RoHS |
| Environment | |
| Operating Temperature | -10 ~ 60 degrees C |
| Storage Temperature | -10 ~ 70 degrees C |
| Humidity | 5 ~ 95% (non-condensing) |

## Dimensions

- ICS-120

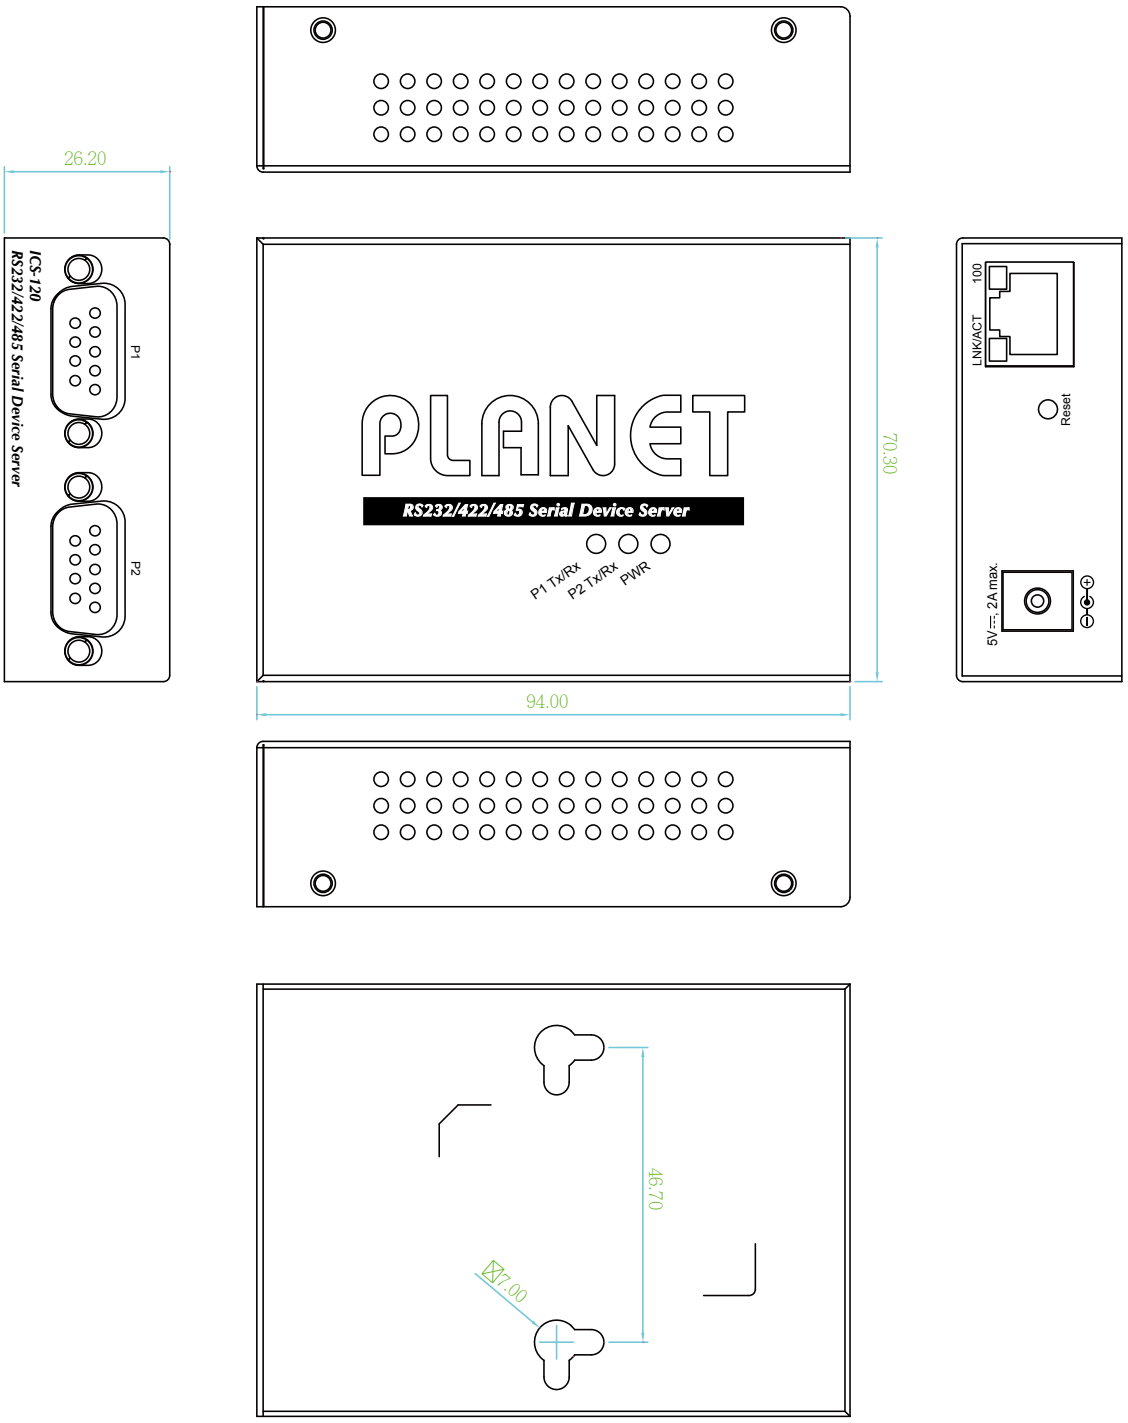


***Unit: mm***

## Ordering Information

| | |
|---|---|
| ICS-120 | 2-Port RS232/422/485 Serial Device Server |

## Related Products

| | |
|---|---|
| ICS-110 | 1-Port RS232/422/485 Serial Device Server |
| ICS-115A | 1-Port RS232/422/485 Serial Device Server with 1-Port 100BASE-FX SFP |
| ICS-2100T | IP30 Industrial 1-Port RS232/RS422/RS485 Serial Device Server (1 x 10/100TX, -40~75 degrees C) |
| ICS-2105AT | IP30 Industrial 1-Port RS232/RS422/RS485 Serial Device Server (1 x 100FX, -40~75 degrees C) |
| IMG-2200T | IP30 Industrial 2-Port RS232/RS422/RS485 Modbus Gateway (2 x 10/100TX, -40~75 degrees C, 2KV isolation) |
| IMG-2400T | IP30 Industrial 4-Port RS232/RS422/RS485 Modbus Gateway (2 x 10/100TX, -40~75 degrees C, 2KV isolation, 2 x DI + 2 x DO) |

**PLANET Technology Corporation**

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518 Fax: 886-2-2219-9528

Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2020 PLANET Technology Corp. All rights reserved.