ST Optical Fibre Adaptors

STERLING

Fibre

Description

Cabcon ST adaptors have high precision alignment sleeves for reliability and better reconnectability. ST adaptors come with a ceramic sleeve for the singlemode and phosphor bronze sleeve for the multimode. The housing is available in double D footprint type.





Features & Benefits


- **Complies with IEC 61754-2**
- **Low insertion loss and high reconnectability capability**
- **RoHS, REACH SvHC compliant**
- **Available in simplex or duplex**

Applications

- **Data processing networks**
- **Premises distribution**

Technical Specification

	CERAMIC	PHOS. BRONZE	CONFORMANCE
Insertion Loss (Typ)	0.1 dB	0.15 dB	IEC 61300-3-4
Mating Durability	-	500	IEC61300-2-2
Receptacle Retention Force	-	1N - 2.5N	IEC 61754-4
Operating Temp. (°C)	-	-25 to +70 12 cycles	IEC 61300-2-22

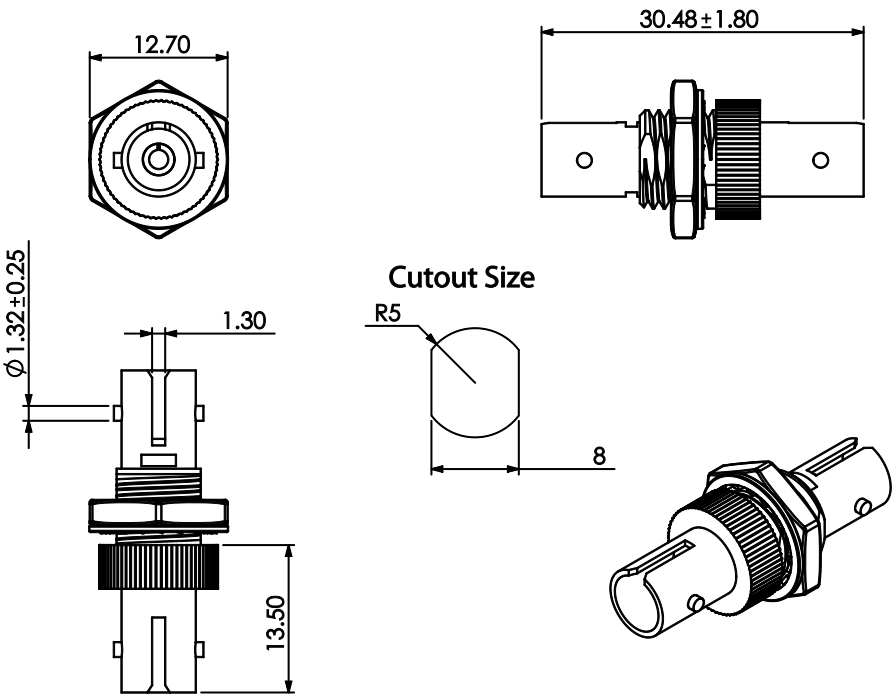

STERLING