





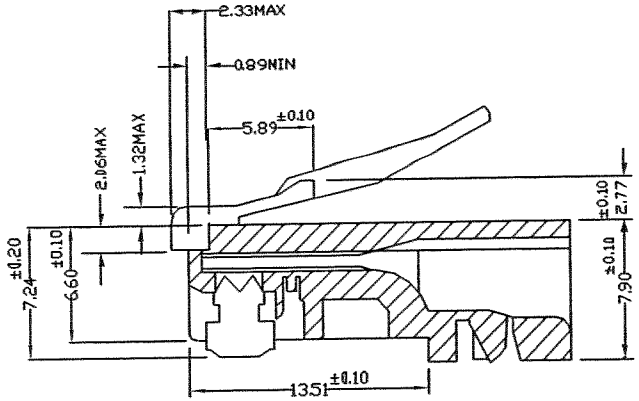


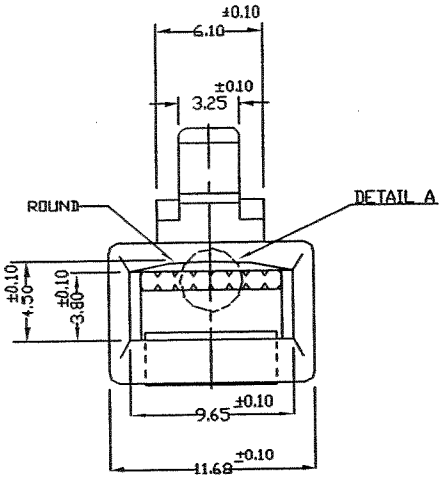



DETAIL A

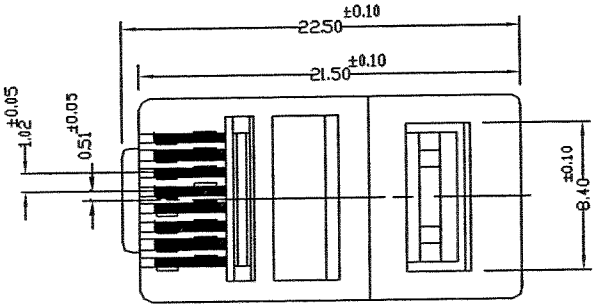

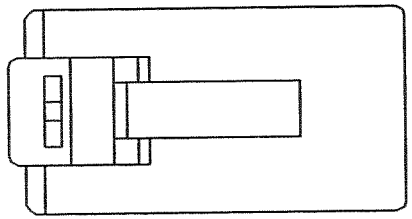

SPECIFICATIONS:

☐ MATERIAL

HOUSING:POLYCARBONATE(PC),
UL94V-0 OR UL94V-2,
CONTACT:PHOSPHOR BRONZE
FINE GOLD PLATED OVER NICKEL.

☐ MECHANICAL

CABLE TO PLUG TENSILE STRENGTH:
20lbs MINIMUM,
DURABILITY:200 MATING CYCLES MIN,

☐ ELECTRICAL

UL APPLICATIONS:250 VOLTS AC
MAX,AT 2 AMPS,
DIELECTRIC WITHSTANDING VOLTAGE:
500 VOLTS AC,
INSULATION RESISTANCE:500 MEGOHMS,
TERMINATION RESISTANCE:35 MILLIOHMS
MAX,AFTER ENVIRONMENTAL TESTING,

APPD.		P/N.	P88RB50
CHKD.		FILE	
DR.		TITLE	8P8C

REV.	DESCRIPTION	ENG.	APPROVAL

CABCON UK

SCALE	/	SIZE	A4
UNIT	MM	REV.	A