
Sentinel Connector Systems Inc.


1953 Stanton Street


York, Pa. 17404


PART NO.: 111-08080054L34


* EIGHT CONDUCTOR MODULAR PLUG
* FOR CONDUCTORS WITH AN O.D. OF .042
* USES .012 CONTACT
* PRODUCT REQUIRES A LOAD BAR
* FOR CAT 6 PATCH CORD APPLICATIONS
* FOR SOLID OR STRANDED WIRE APPLICATIONS
* PATENT PENDING




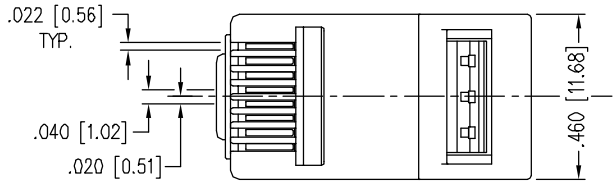





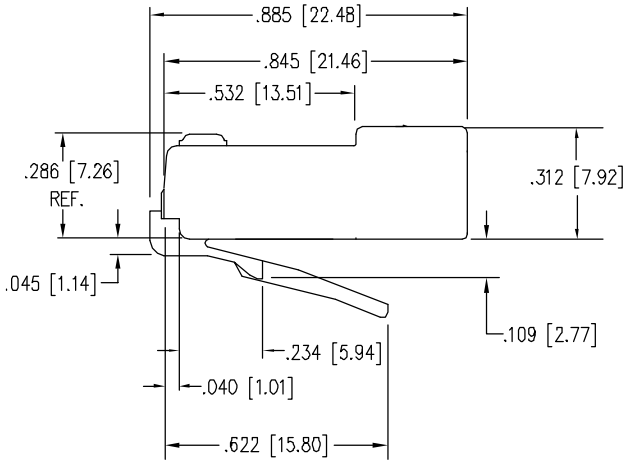




"PATENTED"

SPECIFICATIONS :

PERFORMANCE:	MEETS OR EXCEEDS CATAGORY 6 EIA/TIA 568 A-B,2
CONTACT MATERIAL:	PHOSPHOR BRONZE - .012 THK
CONTACT PLATING:	50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA OVER 100 MICRO-INCH MINIMUM NICKEL PLATE PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.
PLUG MATERIAL:	POLYCARBONATE
PLUG TOLERANCES AND DIMENSIONS:	COMPLIES WITH F.C.C REQUIREMENTS
FLAME AUTO EXTINGUISH	94-VO - File# E188111
OPERATION TEMPERATURE:	-40°C TO +85°C
INSERTION/EXTRACTION LIFE:	1000 CYCLES
CONTACT RESISTANCE:	10 MILLOHMS MAX.
CURRENT/VOLTAGE:	30 VAC/42 VDC AT 1.5 AMPS

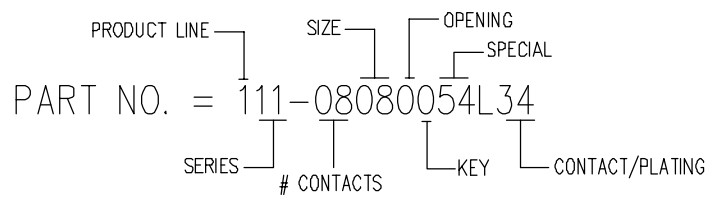

SD000146

03/24/03 REV A1
02/06/03 REV A0